Kanlux

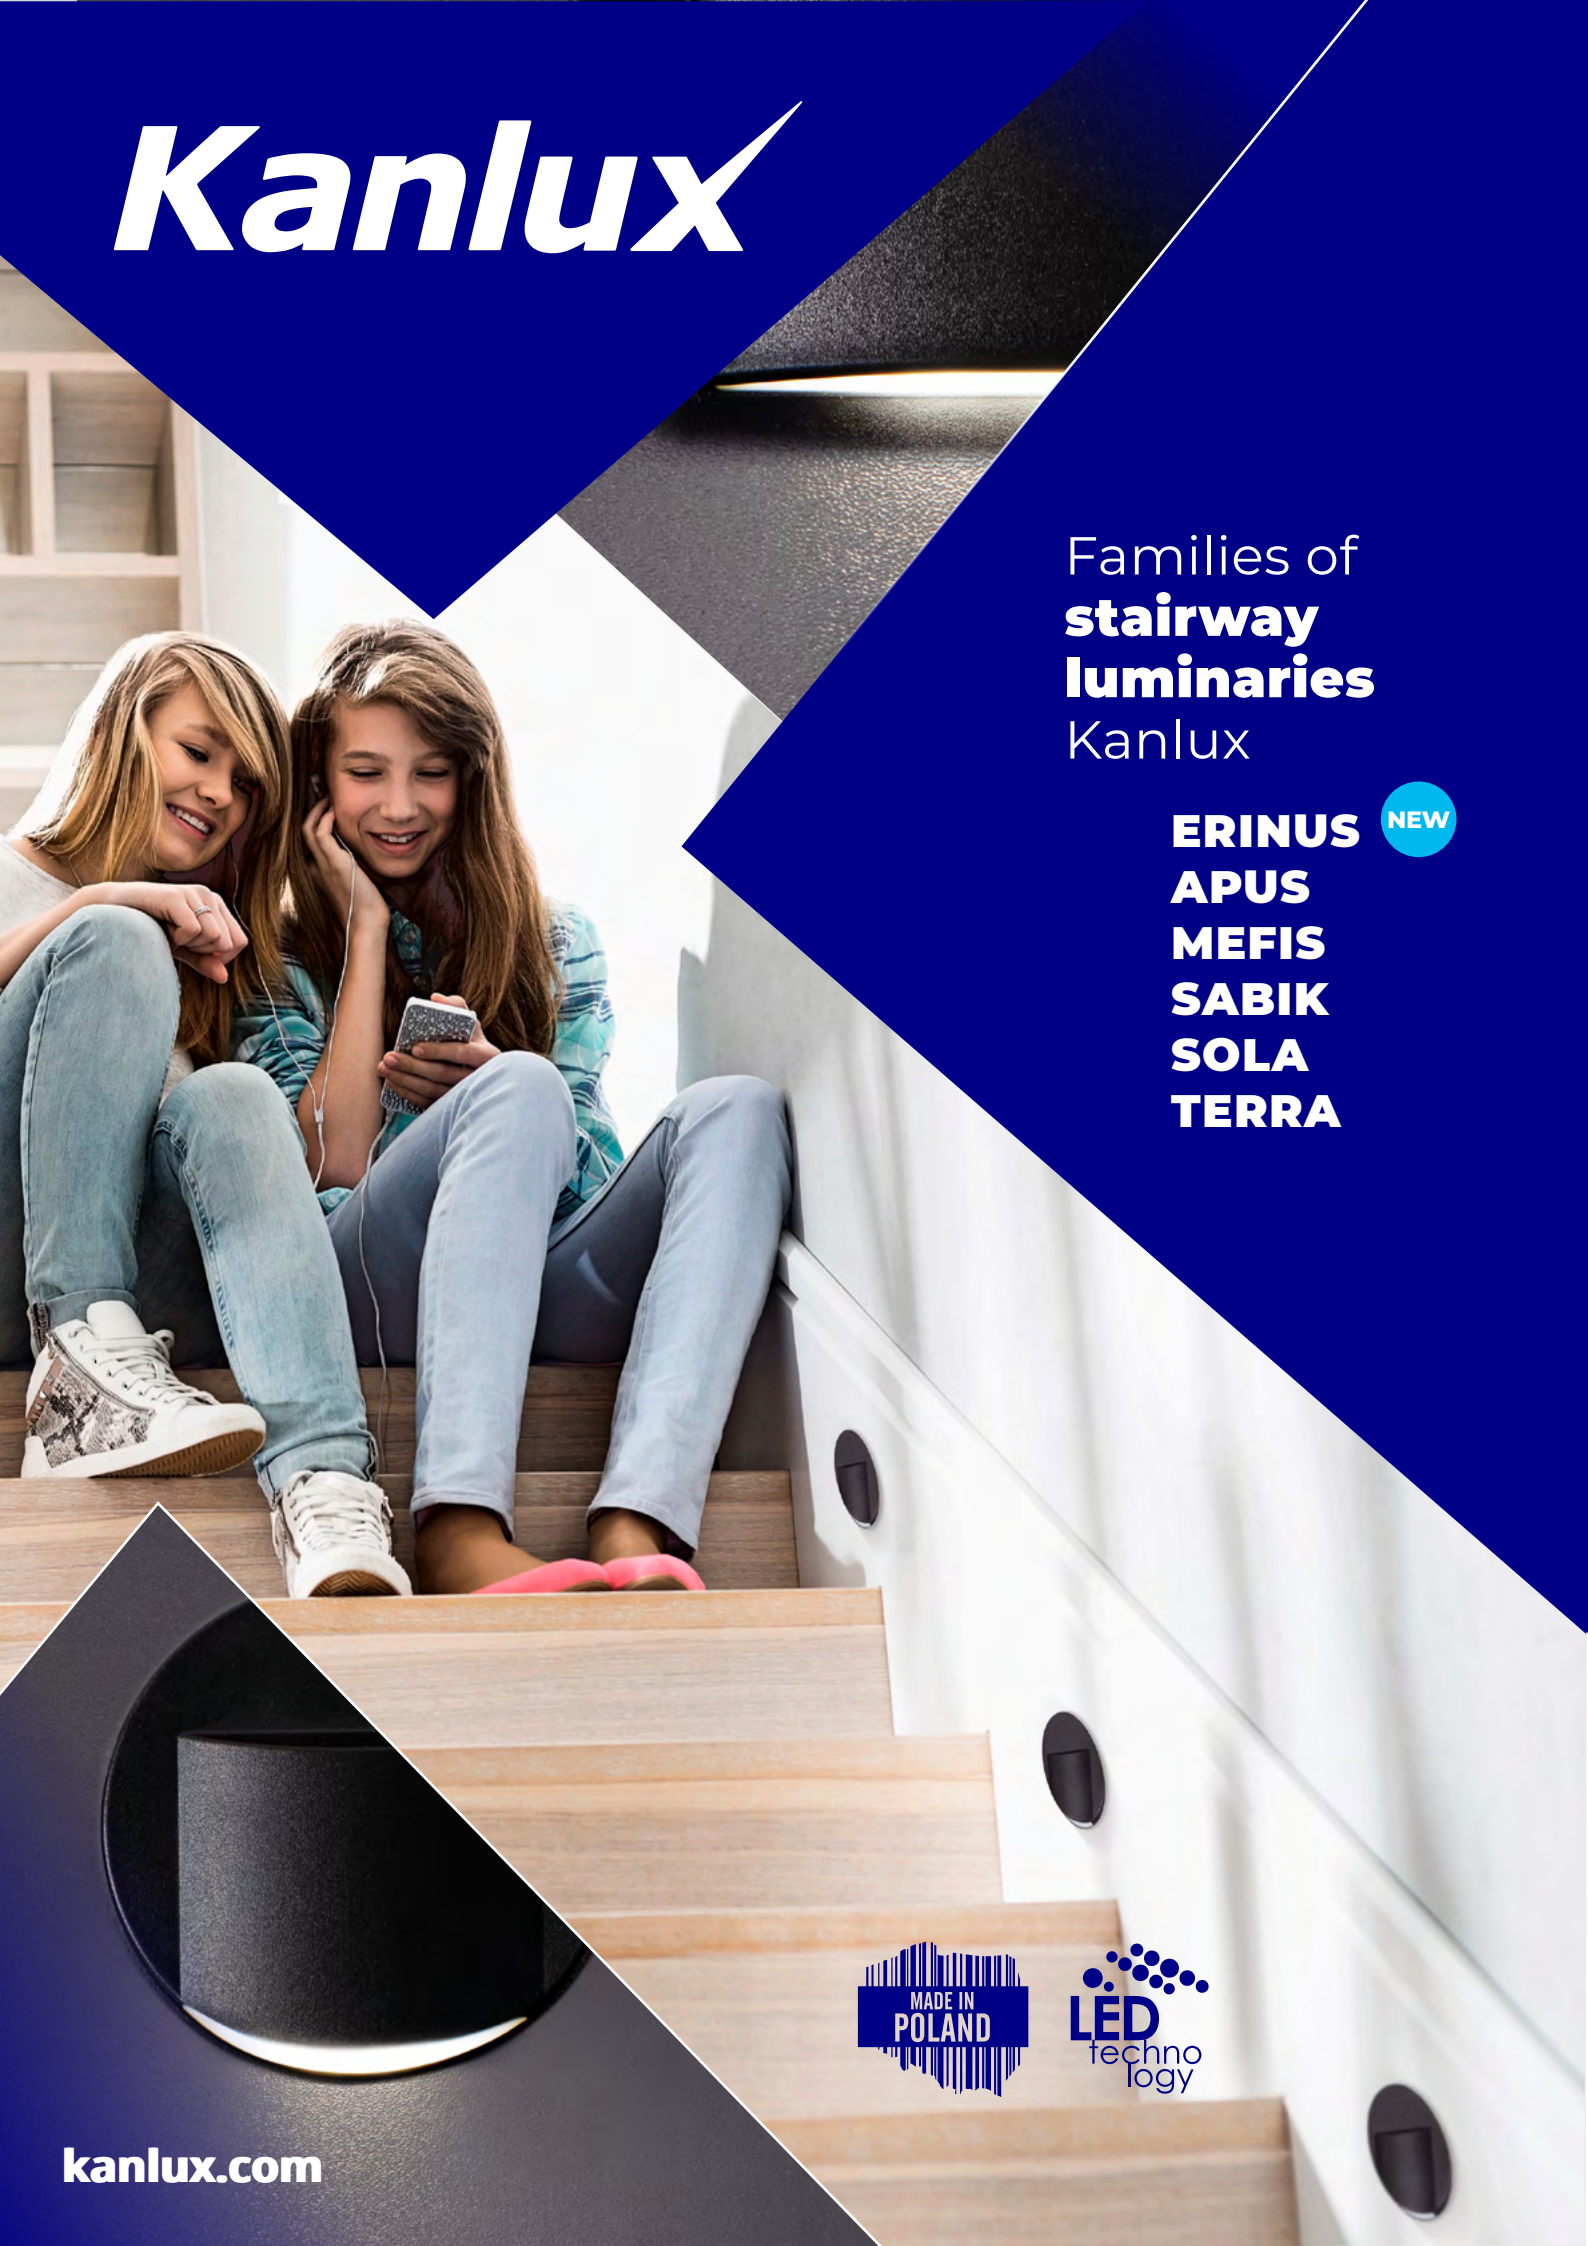

Families of
stairway luminaries
Kanlux

ERINUS NEW
APUS
MEFIS
SABIK
SOLA
TERRA

MADE IN POLAND

LED technology

kanlux.com

NEW

Kanlux
ERINUS LED

Kanlux ERINUS LED luminaires are very thin, adding the benefit of fitting flush with the wall thus making it a more a discreet decorative fixture. ERINUS MODELS: ERINUS L - square luminaire - glows in one direction. ERINUS LL model glows in two directions. ERINUS O is a round luminaire that glows in one direction. Housing material: plastic

available in 3 colours
dimension: 75x75x11mm
CUT OUT 60mm
durability: 30 000h

	CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
	33333	**ERINUS LED L B-NW**	black	12 DC	-	0.8 W	15 lm	4000 K
	33332	**ERINUS LED L B-WW**	black	12 DC	-	0.8 W	15 lm	3000 K
	33327	**ERINUS LED L GR-NW**	grey	12 DC	-	0.8 W	15 lm	4000 K
	33326	**ERINUS LED L GR-WW**	grey	12 DC	-	0.8 W	15 lm	3000 K
	33321	**ERINUS LED L W-NW**	white	12 DC	-	0.8 W	15 lm	4000 K
	33320	**ERINUS LED L W-WW**	white	12 DC	-	0.8 W	15 lm	3000 K
	33337	**ERINUS LED LL B-NW**	black	12 DC	-	1.5 W	30 lm	4000 K
	33336	**ERINUS LED LL B-WW**	black	12 DC	-	1.5 W	30 lm	3000 K
	33331	**ERINUS LED LL GR-NW**	grey	12 DC	-	1.5 W	30 lm	4000 K
	33330	**ERINUS LED LL GR-WW**	grey	12 DC	-	1.5 W	30 lm	3000 K
	33325	**ERINUS LED LL W-NW**	white	12 DC	-	1.5 W	30 lm	4000 K
	33324	**ERINUS LED LL W-WW**	white	12 DC	-	1.5 W	30 lm	3000 K
	33335	**ERINUS LED O B-NW**	black	12 DC	-	0.8 W	15 lm	4000 K
	33334	**ERINUS LED O B-WW**	black	12 DC	-	0.8 W	15 lm	3000 K
	33329	**ERINUS LED O GR-NW**	grey	12 DC	-	0.8 W	15 lm	4000 K
	33328	**ERINUS LED O GR-WW**	grey	12 DC	-	0.8 W	15 lm	3000 K
	33323	**ERINUS LED O W-NW**	white	12 DC	-	0.8 W	15 lm	4000 K
	33322	**ERINUS LED O W-WW**	white	12 DC	-	0.8 W	15 lm	3000 K

AN INTERESTING AND ELEGANT DESIGN

is an additional advantage with this Kanlux family of stairway luminaires.

Kanlux MEFIS LED

MEFIS LED is an unusual series of stairway fixtures.
The Kanlux MEFIS LED luminaire is an unusual shape with ***a focused light beam*** *which can be directed so they illuminate the points you want.*
Housing material: plastic

available in 3 colours
dimension: 75x75x24mm
CUT OUT ⌀ 60mm
durability: 50 000h

CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
32496	**MEFIS LED B-WW**	black	12 DC	-	0.7 W	30 lm	3000 K
32497	**MEFIS LED B-NW**	black	12 DC	-	0.7 W	35 lm	4000 K
32494	**MEFIS LED W-WW**	white	12 DC	-	0.7 W	30 lm	3000 K
32495	**MEFIS LED W-NW**	white	12 DC	-	0.7 W	35 lm	4000 K
32498	**MEFIS LED GR-WW**	grey	12 DC	-	0.7 W	30 lm	3000 K
32499	**MEFIS LED GR-NW**	grey	12 DC	-	0.7 W	35 lm	4000 K

Kanlux APUS LED

The unique body design ensures ***even light emission.***
The AC version is equipped with a 230V power supply, which fits in the mounting box.
The PIR version is equipped with the motion sensor.
The sensor detects movement and turns on lighting regardless of the intensity and the light.
Housing material: brushed stainless steel, plastic

available in 3 colours
dimension: 75x75x7mm
CUT OUT ⌀ 60mm
durability: 50 000h

CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
26536	**APUS LED AC B-NW**	black	220-240 AC	-	1.3 W	14 lm	4000 K
26537	**APUS LED AC B-WW**	black	220-240 AC	-	1.3 W	13 lm	3000 K
26538	**APUS LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
26539	**APUS LED B-WW**	black	12 DC	-	0.8 W	13 lm	3000 K
29856	**APUS LED PIR B-NW**	black	12 DC	≋	0.8 W	14 lm	4000 K
29857	**APUS LED PIR B-WW**	black	12 DC	≋	0.8 W	13 lm	3000 K
32488	**APUS LED NW**	stainless steel	12 DC	-	0.8 W	14 lm	4000 K
23801	**APUS LED AC-CW**	stainless steel	220-240 AC	-	1.3 W	15 lm	6500 K
23800	**APUS LED AC-WW**	stainless steel	220-240 AC	-	1.3 W	13 lm	3000 K
23107	**APUS LED CW**	stainless steel	12 DC	-	0.8 W	15 lm	6500 K
23106	**APUS LED WW**	stainless steel	12 DC	-	0.8 W	13 lm	3000 K
27370	**APUS LED PIR WW**	stainless steel	12 DC	≋	0.8 W	13 lm	3000 K
27371	**APUS LED PIR CW**	stainless steel	12 DC	≋	0.8 W	15 lm	6500 K
26840	**APUS LED W-WW**	white	12 DC	-	0.8 W	13 lm	3000 K
26841	**APUS LED W-CW**	white	12 DC	-	0.8 W	15 lm	6500 K

Families of **stairway luminaries** Kanlux

HAS THE PERFECT IDEA FOR BACK LIGHTING STAIRWAYS AND CORRIDORS OR TO ACCENTUATE THE DÉCOR OF THE ROOMS.

Kanlux SABIK LED

*The unique housing design ensures **even light emission.***
The AC version is equipped with a 230V power supply, which fits in the mounting boxes.
The PIR version is equipped with the motion sensor.
The sensor detects movement and turns on lighting regardless of the intensity and the light.
Housing material: ground stainless steel, plastic

available in 2 colours
dimension: 75x75x7mm
CUT OUT ⌀ 60mm
durability: 50 000h

	CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
	29850	**SABIK LED AC B-NW**	black	220-240 AC	-	1.3 W	14 lm	4000 K
	29851	**SABIK LED AC B-WW**	black	220-240 AC	-	1.3 W	13 lm	3000 K
	29852	**SABIK LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
	29853	**SABIK LED B-WW**	black	12 DC	-	0.8 W	13 lm	3000 K
	29854	**SABIK MINI LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
	29855	**SABIK MINI LED B-WW**	black	12 DC		0.8 W	13 lm	3000 K
	29858	**SABIK LED PIR B-NW**	black	12 DC	≋	0.8 W	14 lm	4000 K
	29859	**SABIK LED PIR B-WW**	black	12 DC	≋	0.8 W	13 lm	3000 K
	23803	**SABIK LED AC-CW**	stainless steel	220-240 AC	-	1.3 W	15 lm	6500 K
	23802	**SABIK LED AC-WW**	stainless steel	220-240 AC	-	1.3 W	13 lm	3000 K
	23110	**SABIK LED CW**	stainless steel	12 DC	-	0.8 W	15 lm	6500 K
	23108	**SABIK LED WW**	stainless steel	12 DC	-	0.8 W	13 lm	3000 K
	32490	**SABIK MINI LED NW**	stainless steel	12 DC	-	0.8 W	14 lm	4000 K
	23111	**SABIK MINI LED CW**	stainless steel	12 DC	-	0.8 W	15 lm	6500 K
	23109	**SABIK MINI LED WW**	stainless steel	12 DC	-	0.8 W	13 lm	3000 K
	27374	**SABIK LED PIR WW**	stainless steel	12 DC	≋	0.8 W	13 lm	3000 K
	27375	**SABIK LED PIR CW**	stainless steel	12 DC	≋	0.8 W	15 lm	6500 K

Highlight selected places at home.

Kanlux TERRA LED

*The unique housing design ensures **even light emission.***
The AC version is equipped with a 230V power supply, which fits in the mounting boxes, and the PIR version is equipped with the motion sensor.
The sensor detects movement and turns on lighting regardless of the intensity and the light.
Housing material: brushed stainless steel, plastic

available in 3 colours
dimension: 75x75x7mm
CUT OUT ⌀ 60mm
durability: 50 000h

CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
26847	**TERRA LED AC B-WW**	black	220-240 AC		1.3 W	13 lm	3000 K
26846	**TERRA LED AC B-NW**	black	220-240 AC	-	1.3 W	14 lm	4000 K
26849	**TERRA LED B-WW**	black	12 DC	-	0.8 W	13 lm	3000 K
26848	**TERRA LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
27377	**TERRA MINI LED B-WW**	black	12 DC	-	0.8 W	13 lm	3000 K
27376	**TERRA MINI LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
29860	**TERRA LED PIR B-NW**	black	12 DC	)	0.8 W	14 lm	4000 K
29861	**TERRA LED PIR B-WW**	black	12 DC	)	0.8 W	13 lm	3000 K
23806	**TERRA LED AC-WW**	stainless steel	220-240 AC		1.3 W	13 lm	3000 K
23807	**TERRA LED AC-CW**	stainless steel	220-240 AC	-	1.3 W	15 lm	6500 K
23104	**TERRA LED CW**	stainless steel	12 DC		0.8 W	15 lm	6500 K
23102	**TERRA LED WW**	stainless steel	12 DC		0.8 W	13 lm	3000 K
23105	**TERRA MINI LED CW**	stainless steel	12 DC		0.8 W	15 lm	6500 K
23103	**TERRA MINI LED WW**	stainless steel	12 DC		0.8 W	13 lm	3000 K
27372	**TERRA LED PIR WW**	stainless steel	12 DC	)	0.8 W	13 lm	3000 K
27373	**TERRA LED PIR CW**	stainless steel	12 DC	)	0.8 W	15 lm	6500 K
26842	**TERRA LED W-WW**	white	12 DC	-	0.8 W	13 lm	3000 K
26843	**TERRA LED W-CW**	white	12 DC	-	0.8 W	15 lm	6500 K

Kanlux SOLA LED

*The unique housing design ensures **even light emission.***
The AC version is equipped with a 230V power supply, which can be fitted in the mounting box.
The housing is suitable for installation in box size ø 60 mm.
Housing material: brushed stainless steel, plastic

available in 2 colours
dimension: Ø70x7mm
CUT OUT ⌀ 60mm
durability: 50 000h

CODE	NAME	COLOUR	POWER	MOTION SENSOR	POWER	LUMINOUS FLUX	COLOUR TC
27556	**SOLA LED AC B-NW**	black	220-240 AC	-	1.3 W	14 lm	4000 K
27557	**SOLA LED AC B-WW**	black	220-240 AC	-	1.3 W	13 lm	3000 K
27558	**SOLA LED B-NW**	black	12 DC	-	0.8 W	14 lm	4000 K
27559	**SOLA LED B-WW**	black	12 DC	-	0.8 W	13 lm	3000 K
32491	**SOLA LED NW**	stainless steel	12 DC	-	0.8 W	14 lm	4000 K
23805	**SOLA LED AC-CW**	stainless steel	220-240 AC	-	1.3 W	15 lm	6500 K
23804	**SOLA LED AC-WW**	stainless steel	220-240 AC	-	1.3 W	13 lm	3000 K
23101	**SOLA LED CW**	stainless steel	12 DC	-	0.8 W	15 lm	6500 K
23100	**SOLA LED WW**	stainless steel	12 DC	-	0.8 W	13 lm	3000 K

MADE IN POLAND

All luminaries made in Poland.

Packed in a presentational packaging.