

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 8738 CL IOS LED WHITE 20W, 4000K,ANGLE36°



#### Description Lines

---

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8738,CL IOS LED WHITE 20W,4000K,ANGLE36
File name:	8738,CL IOS LED WHITE 20W,4000K,ANGLE36.ltd
Date:	2019-12-19
Report number:	EF 19/12/2019/55; EF 19/12/2019/56
Diameter:	134mm
Height:	123mm
IP rating:	IP 20
Protection class:	I
Dimmable:	No

#### Equipment


---

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	1 deg
C interval:	10 deg
γ range:	0-90 deg
Measurement distance:	6.56 m

## Photometric data

Total luminous flux:	1715.12 lm
Color temperature:	3960 K
x:	0.3850
y:	0.3876
Color rendering index:	90.1
Wattage:	20.164 W
U	230.53 V
I	0.0922 A
Power factor:	0.9490
Luminous efficacy:	85.06 lm/W
Flux in lower hemisphere:	100.0%
Flux in upper hemisphere:	0.0%
Maximum luminous intensity:	6588 cd
Light output ratio (LOR):	100.00%

### Beam cone diagram Beam angle 36°

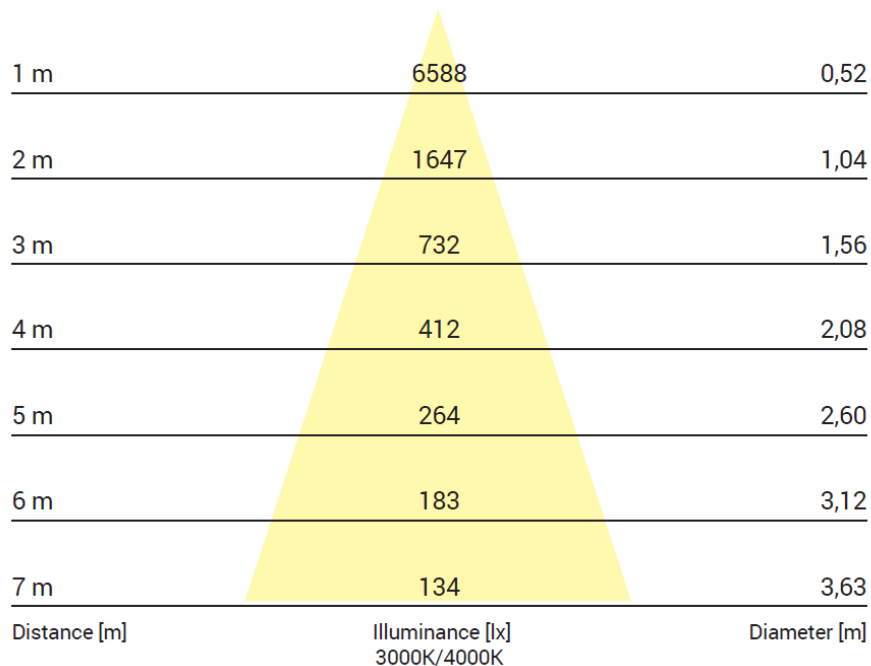


#### Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


[www.nowodvorski.com](http://www.nowodvorski.com)

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

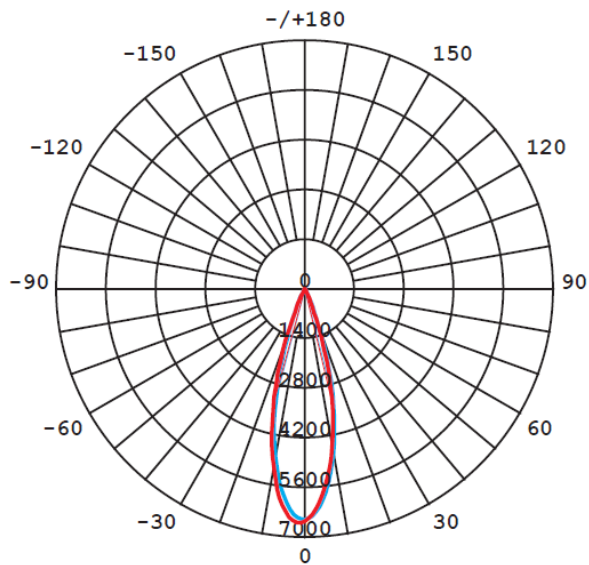

Luminous intensity [cd]  
C0-C180 ————  
C90-C270 ————

## Spectral distribution

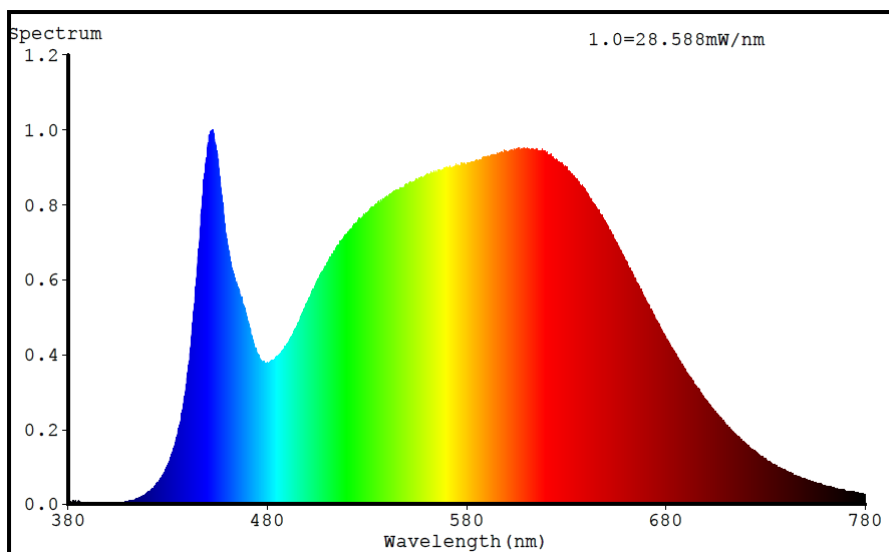

**Nowodvorski sp. j.**

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

[www.nowodvorski.com](http://www.nowodvorski.com)