

LUMINAIRE PHOTOMETRIC TEST REPORT

8762 CTLS MILO LED WHITE 25W, 3000K, ANGLE11°



Description Lines

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8762 CTLS MILO LED WHITE 25W,3000K,ANGLE11
File name:	8762 CTLS MILO LED WHITE 25W,3000K,ANGLE11.ltd
Date:	2019-08-19
Report number:	EF 19/08/2019/26; EF 22/11/2019/30
Length:	215 mm
Width:	73 mm
Height:	196 mm
IP rating:	IP 20
Protection class:	II
Dimmable:	No

Equipment

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	2 deg
C interval:	10 deg
γ range:	0-180 deg
Measurement distance:	6.56 m

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


www.nowodvorski.com

Photometric data

Total luminous flux:	2006.68 lm
Color temperature:	3100 K
x:	0.4349
y:	0.4121
Color rendering index:	91.1
Wattage:	23.602 W
U	230.48 V
I	0.1080 A
Power factor:	0,9483
Luminous efficacy:	85.02 lm/W
Flux in lower hemisphere:	98.6%
Flux in upper hemisphere:	1.4%
Maximum luminous intensity:	24613 cd
Light output ratio (LOR):	100.00%

Beam cone diagram

Beam angle 11°

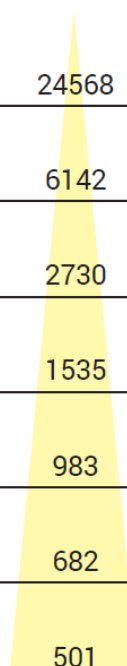

1 m	24568	0,19
2 m	6142	0,38
3 m	2730	0,57
4 m	1535	0,76
5 m	983	0,95
6 m	682	1,14
7 m	501	1,33
Distance [m]	Illuminance [lx] 3000K/4000K	Diameter [m]


Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

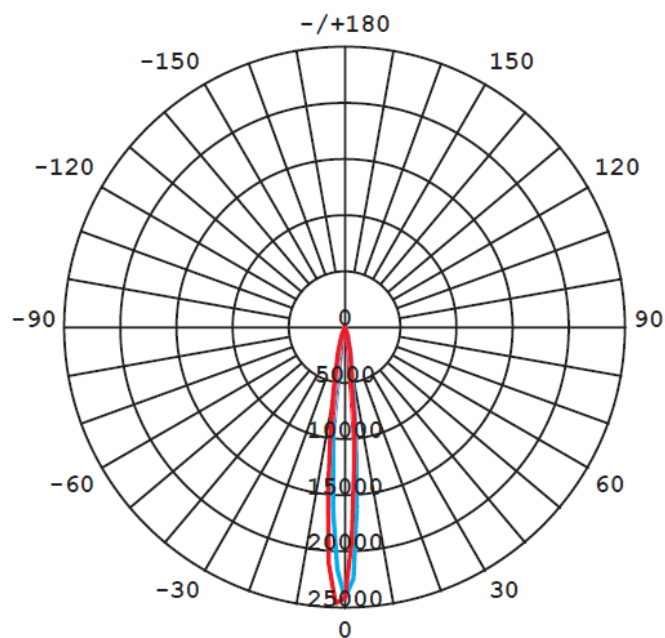


Luminous intensity [cd]

C0-C180

C90-C270

Spectral distribution

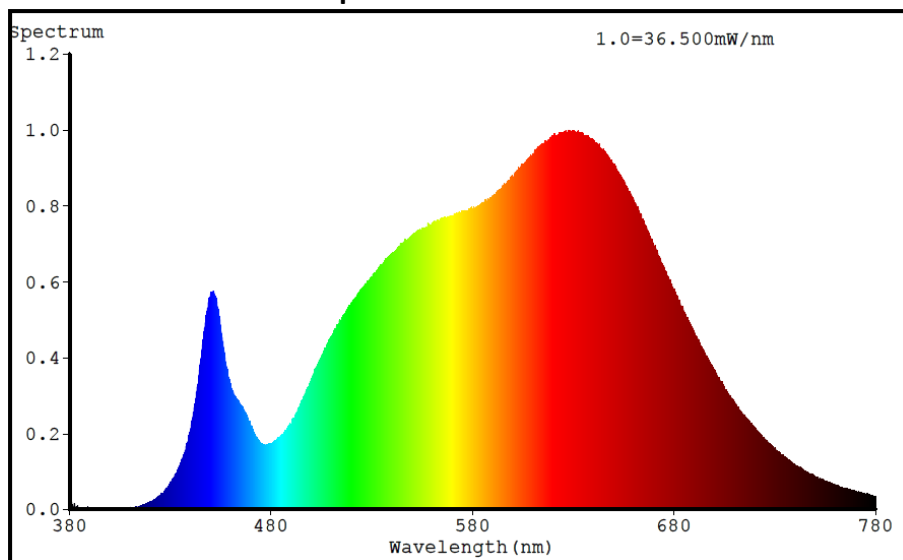

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com